Sungold®

Product Details

PORTABLE SOLAR POWER KITS LVP2-270W











Anderson

Specifications

Certifications


Warranty


ETFE surface

Magnetic handle

Corner protecto

Module Diagram

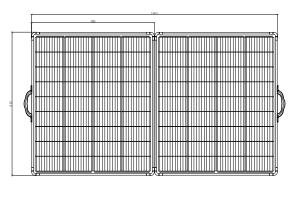

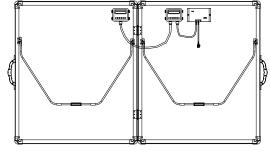



Electrical Characteristics


Maximum power(Pmax)	270W
Open-circuit voltage(Voc)	24.5V
Voltage at Pmax(Vmp)	20.9V
Short-circuit current(Isc)	13.56A
Current at Pmax(Imp)	12.92A
Cells Efficiency(%)	22.7%
The maximum system voltage	100V DC(IEC)
Power temperature coefficient	-0.35%/℃
Voltage temperature coefficient	-0.275%/℃
Current temperature coefficient	0.045%/℃
Output power tolerance	±3%
Operating Temperature	-10°C~60°C

Solar cell brand A grade mono solar cells 182mm No.of cells and connections 72(2*4*9) Folding size 910*780*50mm Development size 1563*910*25mm Weight 11.5KG Output cable Anderson Approvals IP65

*SLINGALD offer customize service please refer to our website or ask SLINGALD workers for more sizes and the latest parameters

Product Introduction

Sungold LVP-series of portable solar panel suitcase includes two same watt Monocrystalline panels which open up to provide more space to capture the sunlight. The unique design makes it much easier to store or transport. When you're traveling the open road, or out in the wilds, that makes a big difference. It is great for outdoor use, camping, RV, and van. Seasoned travelers will love it so much.

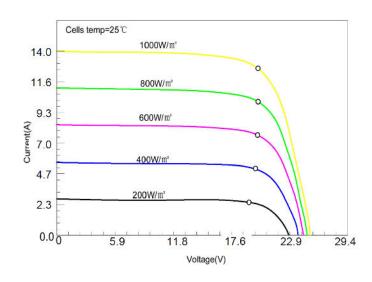

CE, ROHS, FCC

1-year warranty, 10-year service life