

Product Details

FLEXIBLE SOLAR PANEL SG-TF-D2-255W



Anti-Slip Surface



Junction Box



MC4


Electrical Characteristics

Maximum power(Pmax)	255W
Open-circuit voltage(Voc)	30.8V
Voltage at Pmax(Vmp)	26.1V
Short-circuit current(Isc)	10.36A
Current at Pmax(Imp)	9.78V
Cells Efficiency(%)	22.7%
The maximum system voltage	600V DC(IEC)
Power temperature coefficient	-0.38%/°C
Voltage temperature coefficient	-0.36%/°C
Current temperature coefficient	0.07%/°C
Output power tolerance	±3%
Operating Temperature	-40°C+85°C



Specifications

Solar cell brand	166 mono solar cells
No.of cells and connections	225(5*45)
Module dimension	1515*880*3mm
Weight	5.80kg
Output cable	JB (2*bypass diodes) + 900mm/4mm ² cable+MC4 compatible
Waterproof	IP68
Certifications	CE, ROHS
Maximum bending arch height	240mm
Warranty	5 years and service life 20 years

Module Diagram

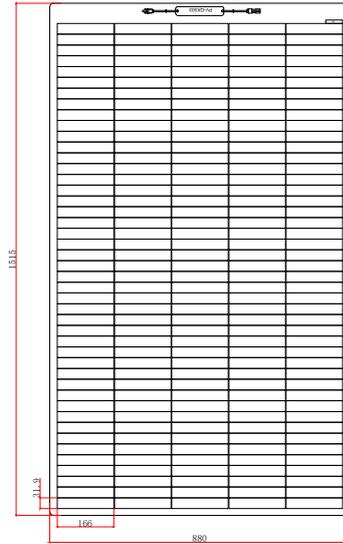


Solar panel bending diagram



Solar panel

Product Introduction

TF series photovoltaic panel adopts proven crystalline silicon solar cell technology and polymer composite material to achieve a new type of pv module that is glass-free, lightweight and thin sheet. The solar cells use PERC Shingle-cell technology to achieve zero cell spacing, which effectively increases the light-receiving area of the module.

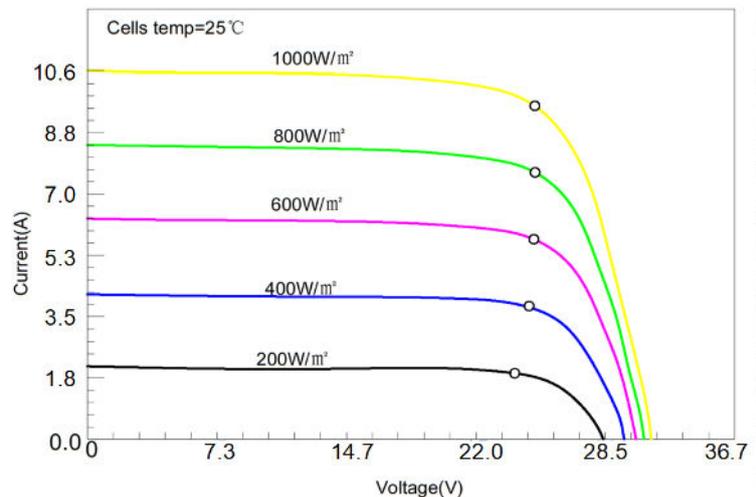

*SUNGOLD offer customize service, please refer to our website or ask SUNGOLD workers for more sizes and the latest parameters.