





Product Details

PORTABLE SOLAR PANEL BXF PLUS-2*50W

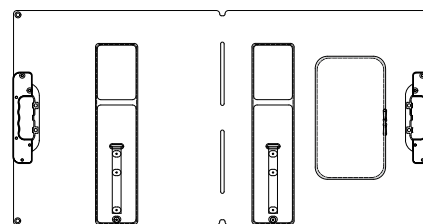

Module Diagram

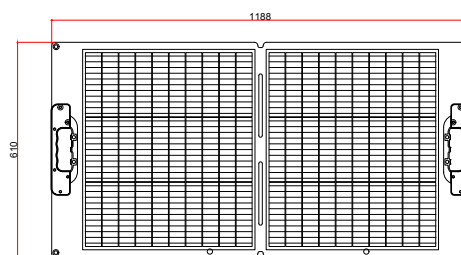

Electrical Characteristics

Maximum power(Pmax)	100W
Open-circuit voltage(Voc)	20.4V
Voltage at Pmax(Vmp)	17.4V
Short-circuit current(Isc)	6.03A
Current at Pmax(Impp)	5.75A
Cells Efficiency(%)	22.7%
The maximum system voltage	200 V DC(IEC)
Power temperature coefficient	-0.35%/°C
Voltage temperature coefficient	-0.275%/°C
Current temperature coefficient	0.045%/°C
Output power tolerance	±5%
Operating Temperature	-10°C~60°C

Specifications

Solar cell brand	182 mono solar cells
Folding size	610*590*35mm
Development size	1188*610*3mm
Weight	3.5KG
Approvals	IP67
Certifications	CE, ROHS, FCC
Warranty	Warranty 1 year


Product Introduction

BXF series adopts advanced technology and polymer material, which has crack resistance, effectively extending the service life of solar panels.

BXF series solar panels are lightweight and easy to carry and can be easily hung on backpacks and tents.

This is a super powerful panel to quickly get the energy you need from the sun with this solar cell phone charger mobile power. The large BXF Series portable solar panel allows you to charge multiple devices at the same time quickly.

Charge your electronic devices on hikes, camping trips, and other outdoor activities.

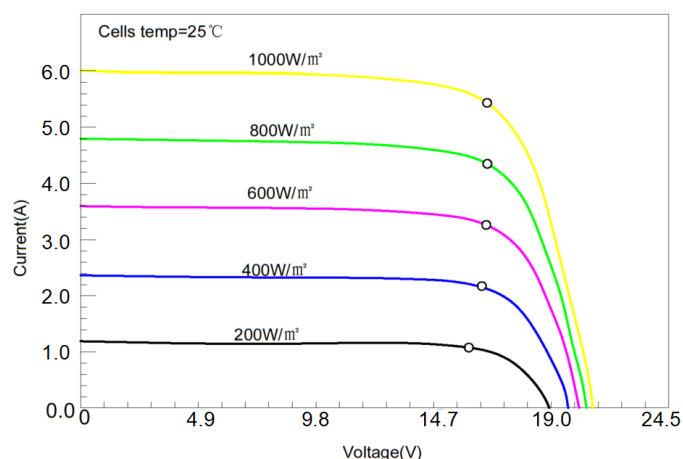

*SUNGOLD offer customize service, please refer to our website or ask SUNGOLD workers for more sizes and the latest parameters.